



“Guzzler Jr.”



- Ideal for portable handwash stations
- Angled pump face for ease of operation from a standing position
- Accommodates 1/4" - 1/2" hose
- 1.3 GPM
- Available with standard or heavy-duty stainless steel spring
- Optional Quick-connect TrueSeal™ fittings for ease of installation
- Umbrella valves to maintain prime

Specifications / Options

Pump Body *	Acrylonitrile-Butadiene-Syrene (ABS)
Clamp Ring	Stainless Steel
Valves *	Umbrella (Silicone)
Diaphragm *	Natural Rubber
I/O Flange Cartridges*	PVC
Internal Spring *	Standard (Std), Heavy-Duty (HD) (all stainless steel)
Fittings*	Acetal w/Nitrile O-Ring for TrueSeal fittings / Nylon for Barbed fittings

* In contact with fluid

End Connectors



Front view of pump with Quick Connect TrueSeal fittings for ease of use with 3/8" hose



Top view of pump with barbed end fittings available for a range of hose sizes

TrueSeal™ is a trademark of Parker-Hannifin Corporation.

930 Waterman Avenue
East Providence, RI 02914
(401) 438-1110 • fax (401) 438-2713
toll-free (888) 438-1110 • www.thebosworthco.com

Guzzler® Foot Pump GF-0250S

Performance

Flow Rate	Per minute ¹ : 1.3 Gal (5.8L) Per stroke: 2.8 oz (83 mL)
Max Head	12 ft (3.6 m)
Max Lift	2.5 ft (0.76 m) (Std spring) 4.2 ft (1.3 m) (HD spring)
Max Pressure	7 psi (0.4 kg/cm ²)
Max. Service Temp	140°F (60°C)

¹: with std spring

Available Ports

	in	1/4	5/16	3/8	1/2
	cm	0.64	0.79	0.95	1.27
TrueSeal™ Quick Connect Fittings				S	
NPT Female (Tapped)	•				
Tapped with Barbed Fittings	•	•	•	•	•

S Standard • Optional

Valves





Umbrella — Most efficient for pumping clean liquid. Also used for air and vacuum service.

Stainless Steel Spring Options



Standard (Std) — 18 lb/in
Heavy Duty — 25 lb/in



	in	cm
A	4-3/8	11.1
B	2-3/4	7.0
C	15°	
D	2-1/8	5.4
E	3-1/2	8.9
F	4	10.2
Mounting Holes	1/4	0.64
Weight	0.55 lb	0.25 kg

Guzzler® and Sea-lect® are trademarks of The Bosworth Company.



Guzzler® Foot Pump



GF-0250S



Product Model Number Nomenclature Guide

Example: GF-0250S-086-09-2929-10

- Guzzler Foot Pump
- Model style #0250S: Polystyrene Body, Same Side Ports
- Silicone Umbrella Valves
- Natural Rubber Diaphragm
- 3/8" Quick Connect ends
- Standard weight Spring

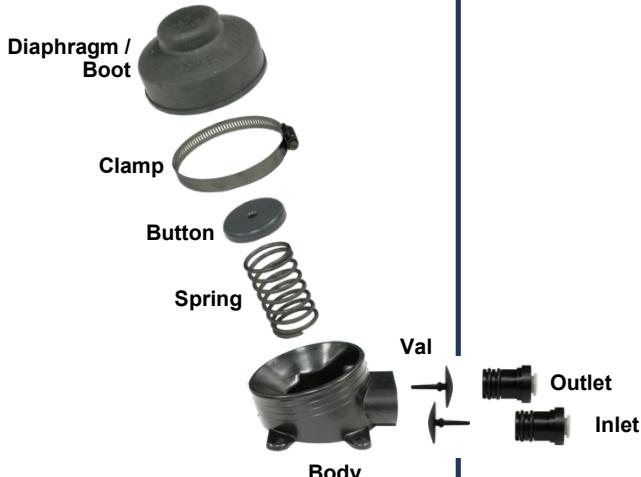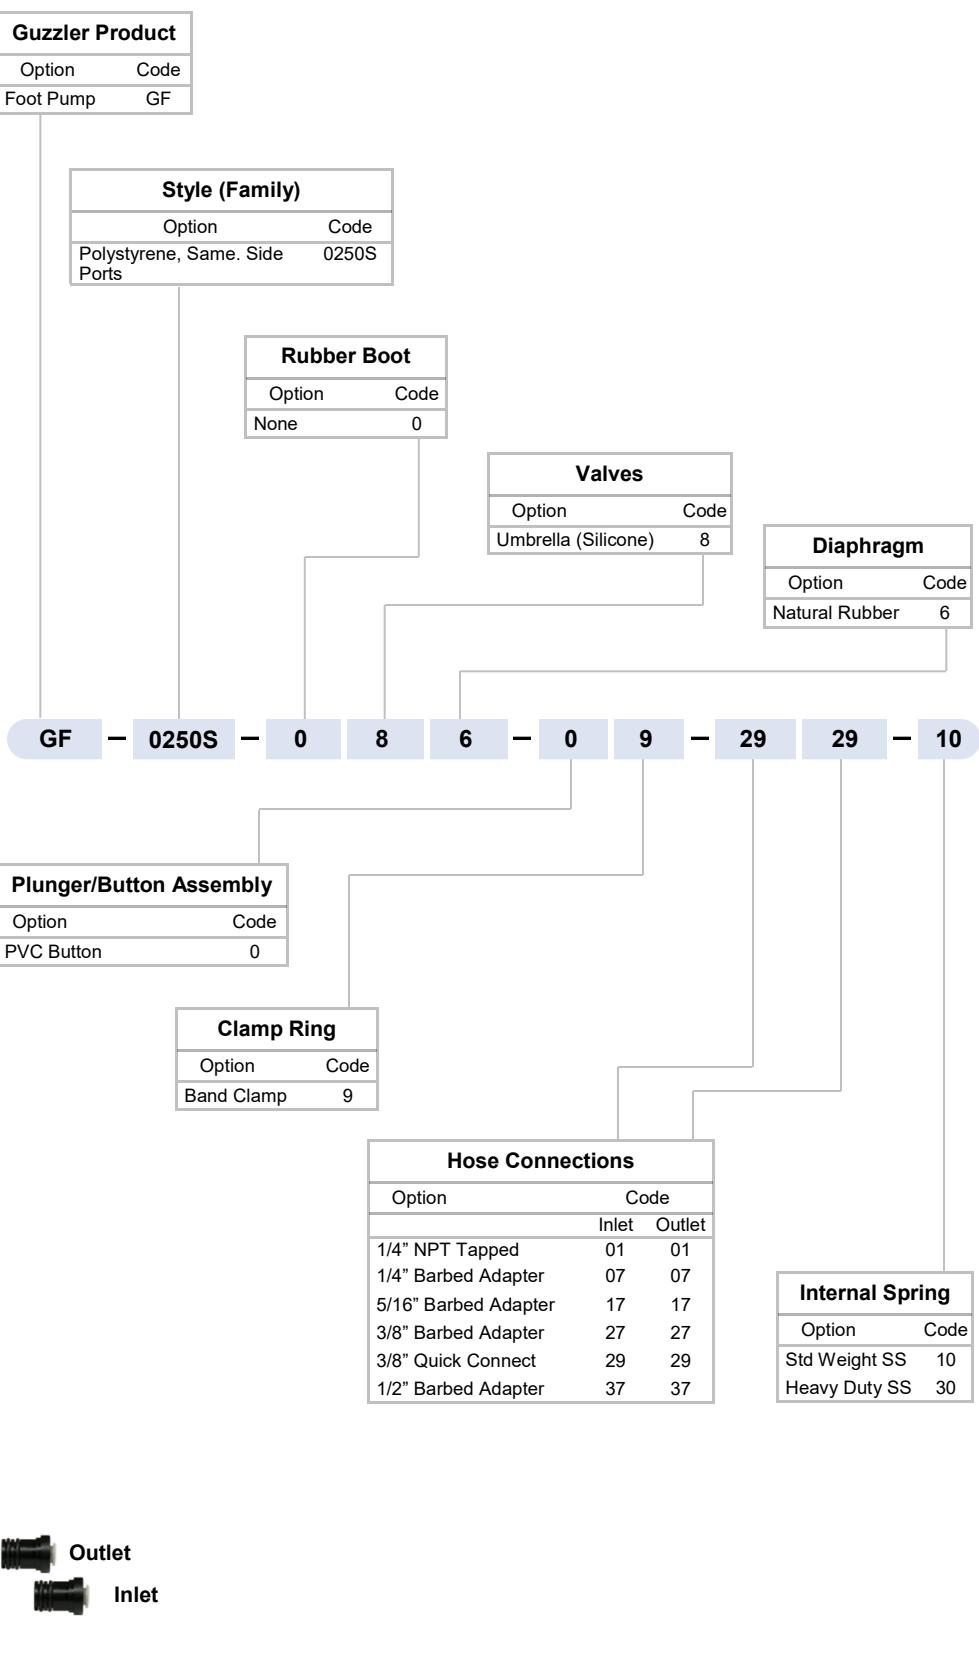

The
BOSWORTH
Company

930 Waterman Avenue, East Providence, RI 02914
(401) 438-1110 • fax (401) 438-2713
toll-free (888) 438-1110 • www.thebosworthco.com

Doc M-2-02-GF-0250S-041520