

Guzzler® Hand Pump GH-M500D



- Flush-mounted below deck or behind wall
 - ◊ Max deck/wall thickness: 3/4 in
- Sleek low-profile polypropylene cover plate available in black or white
- Removable, rugged aluminum handle
- Handle can be positioned in 12 different orientations relative to pump ports
- Accommodates 1-1/4" - 2" hose
- 12 GPM
- Ideal for use as bilge pump

Specifications / Options

Body & Ports *	Acetal (POM) Copolymer / Gray
Clamp Ring	Acetal (POM) Copolymer / Gray
Handle	Aluminum: Vertical (Removable)/ Silver
Cover Plate (Trim Ring)	Polypropylene (Black or White)
Valves *	Flapper, Duckbill
Diaphragm *	Buna-N, Buna-N Double Sided, Neoprene, Viton, EPDM, Silicone
Clevis/Button Assembly *	Acetal (POM) Copolymer / Gray
Actuator	Aluminum, Stainless steel

* In contact with fluid

Removable Handle and Trim Ring Options



Top view of closed Trim Ring and Removable Handle



Black Cover Plate



White Cover Plate

Performance

Flow Rate	Per minute ¹ : 12 Gal (45.4L) Per stroke: 0.55 Qt (0.52L)
Max Lift	12 ft (3.7 m) 22 ft (6.7 m) with check valve
Max Head	30 ft (9.1 m)
Max Pressure	15 psi (1.0 kg/cm ²)
Max Service Temp	212°F (100°C)

¹: at 90 cpm

Available Ports

	in	1-1/4	1-1/2	2
	cm	3.18	3.81	5.08
Hose (Smooth)			S	•
NPT Female (Tapped)		•		
NPT Male (Threaded)			•	

S Standard • Optional

Valve Options




Flapper — General purpose liquid transfer.



Duckbill — For dirty liquid and sewage. Permits mounting in any position.



Pump shown mounted to plexi-glass plate with white trim ring visible above mounting surface



	in	cm
A	9-1/2	24.1
B	4-1/2	11.4
C	12	30.5
D	13-7/8	35.2
E	10-7/8	27.6
F	5	12.7
G	4-1/2	11.4
H	10-1/4	26.0
J	3-3/16	8.10
K	2-7/8	7.30
Mounting Holes	1/4	0.64
Weight	2.50 lb	1.13 kg

Guzzler® Hand Pump

GH-M500D



Product Model Number Nomenclature Guide

Example: GH-M500D-411-87-8080-00

- Guzzler Hand Pump
- Model style #M500D: Acetal Plastic Body, Flush mount, Opposite Side Ports
- Removable Vertical Handle (Silver)
- Buna-N Flapper Valves
- Buna Diaphragm
- Stainless Steel Actuator Assembly
- White Polypropylene Cover Plate
- Inlet: 1-1/2" Smooth
- Outlet: 1-1/2" Smooth
- No Spring

Guzzler Product	
Option	Code
Hand Pump	GH

Style (Family)	
Option	Code
Acetal, Flush mount, Opp. Side Ports	M500D

Handle	
Option	Code
Vertical/Silver (Removable)	4

Valves	
Option	Code
Flapper (Buna-N)	1
Duckbill (Buna-N)	6

Diaphragm	
Option	Code
Buna Nitrile	1
Buna-N 3-Ply	2
Neoprene	3
Viton	4
EPDM	5
Silicone	7


GH - M500D - 4 1 1 - 8 7 - 80 80 - 00

Actuator	
Option	Code
Aluminum	7
Stainless Steel	8

Cover Plate	
Option	Code
Black	6
White	7

Hose Connections		
Option	Code	
	Inlet	Outlet
1-1/4" NPT Tapped	71	71
1-1/2" Smooth	80	80
1-1/2" NPT Threaded	82	82
2" Smooth	90	90

Internal Spring	
Option	Code
No Spring	00
Std Weight SS	10
Lightweight SS	20
Heavy Duty SS	30

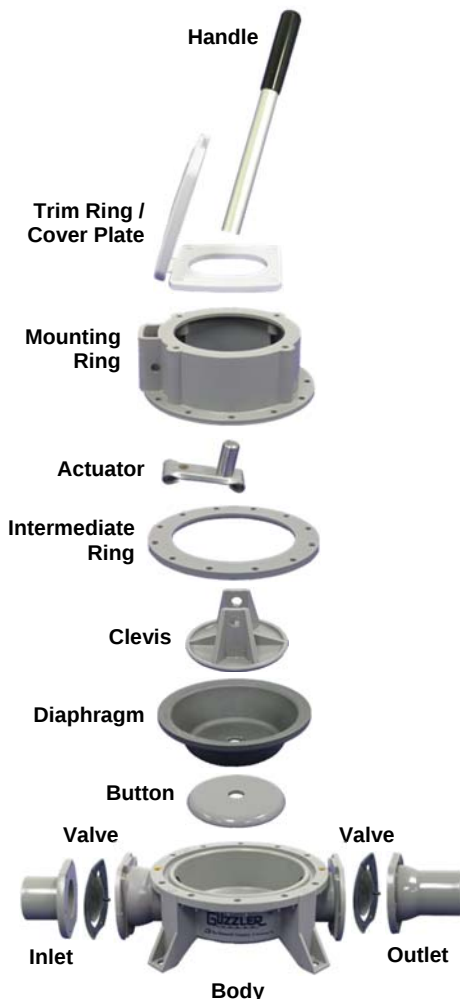

930 Waterman Avenue, East Providence, RI 02914
 (401) 438-1110 • fax (401) 438-2713
 toll-free (888) 438-1110 • www.thebesworthco.com