

Guzzler® Hand Pump GH-0500D



- Durable, lightweight Acetal plastic
- Accommodates 1-1/4" - 2" hose
- 12 GPM
- Rugged aluminum handle
- Clamp ring adjusts to 12 different handle orientations
- Available with horizontal or vertical handle
- Optional aluminum clamp ring for added durability

Specifications / Options

Body & Ports *	Acetal (POM) Copolymer / Gray
Clamp Ring	Acetal, Epoxy-coated Aluminum, Epoxy-coated Aluminum with Stop Brackets
Handle	Aluminum: Horizontal/Silver, Horizontal/Black, Vertical (Removable)/Silver
Valves *	Flapper, Duckbill
Diaphragm *	Buna-N, Buna-N Double Sided, Neoprene, Viton, EPDM, Silicone
Clevis/Button Assembly *	Acetal, SS Washer + Aluminum Clevis, All Stainless Steel
Internal Spring *	None, Lightweight, Standard, Heavy-Duty (all stainless steel)
Other	Thru-Deck Mounting Kit (for vertical handle only)

* In contact with fluid

Additional Optional Clamp Rings



Epoxy-coated Aluminum for reinforcement against vigorous pumping



Epoxy-coated Aluminum with Stop Brackets to prevent over-stroking

Performance

Flow Rate	Per minute ¹ : 12 Gal (45.4L) Per stroke: 0.55 Qt (0.52L)
Max Lift	12 ft (3.7 m) 22 ft (6.7 m) with check valve
Max Head	30 ft (9.1 m)
Max Pressure²	15 psi (1.0 kg/cm ²)
Max Service Temp	212°F (100°C)

¹: at 90 cpm

²: 20 psi with 19 in handle

Available Ports

	in	1-1/4	1-1/2	2
	cm	3.18	3.81	5.08
Hose (Smooth)			S	•
NPT Female (Tapped)		•		
NPT Male (Threaded)			•	

S Standard • Optional

Valve Options




Flapper — General purpose liquid transfer.




Duckbill — For dirty liquid and sewage. Permits mounting in any position.

Optional Extra-Long Handle



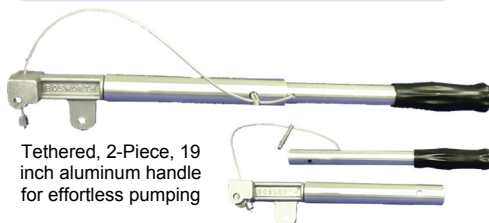


Tethered, 2-Piece, 19 inch aluminum handle for effortless pumping

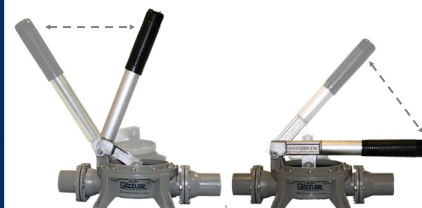

Vertical handle for "back-and-forth" pumping action

Horizontal handle for "up-and-down" pumping action

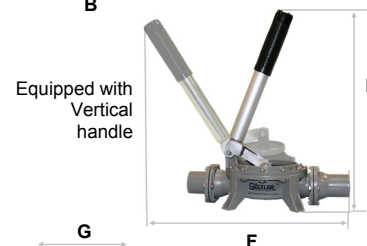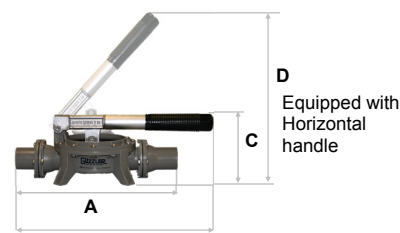

	in	cm
A	10-7/8	27.6
B	13-1/8	33.3
C	4-1/4	10.8
D	12	30.5
E	13-1/2	34.3
F	12-1/2	31.8
G	4-5/16	11.0
Mounting Holes	1/4	0.64
Bolt Circle Diam.	6-1/8	15.6
Weight (w/ Horiz. Hndl.)	1.80 lb	0.82 kg
Weight (w/ Vert. Hndl.)	1.90 lb	0.86 kg

Guzzler® Hand Pump

GH-0500D



Product Model Number Nomenclature Guide

Example: GH-0500D-111-10-8080-00

- Guzzler Hand Pump
- Model style #0500D: Acetal Body, Opposite Side Ports
- Horizontal Handle (Silver)
- Buna-N Flapper Valves
- Buna Diaphragm
- Acetal Plastic Clevis/Button Assembly
- Acetal Plastic Clamp Ring
- Inlet: 1-1/2" Smooth
- Outlet: 1-1/2" Smooth
- No Spring

Guzzler Product	
Option	Code
Hand Pump	GH

Style (Family)	
Option	Code
Acetal, Opp. Side Ports	0500D

Handle	
Option	Code
Horizontal/Silver	1
Horizontal/Black	2
Vertical/Silver (Removable)	4
Horizontal/19"/2-Piece/Tethered	5

Valves	
Option	Code
Flapper (Buna-N)	1
Duckbill (Buna-N)	6

Diaphragm	
Option	Code
Buna Nitrile	1
Buna-N 3-Ply	2
Neoprene	3
Viton	4
EPDM	5
Silicone	7


GH - 0500D - 1 1 1 - 1 0 - 80 80 - 00

Clevis/Button Assembly	
Option	Code
Acetal Plastic	1
Stainless Steel	3
SS Washer & Alum Clevis	4

Clamp Ring	
Option	Code
Acetal Plastic	0
Epoxy-coated Alum	1
Epoxy-coated Alum w/Stop Brackets	4

Hose Connections		
Option	Code	
	Inlet	Outlet
1-1/4" NPT Tapped	71	71
1-1/2" Smooth	80	80
1-1/2" NPT Threaded	82	82
2" Smooth	90	90

Internal Spring	
Option	Code
No Spring	00
Std Weight SS	10
Lightweight SS	20
Heavy Duty SS	30

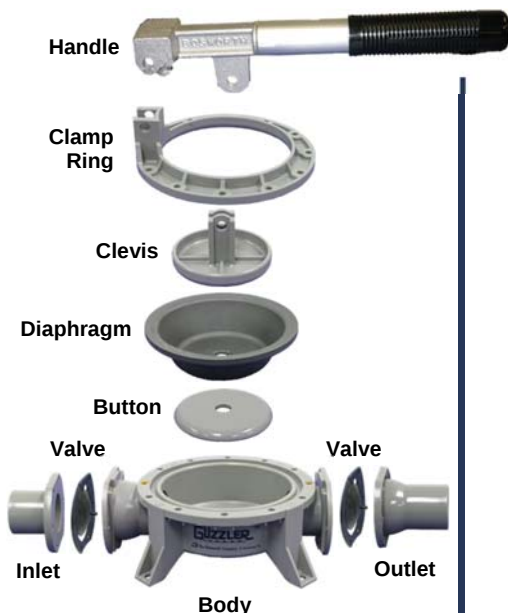

930 Waterman Avenue, East Providence, RI 02914
 (401) 438-1110 • fax (401) 438-2713
 toll-free (888) 438-1110 • www.thebosworthco.com